



USPAS – *Simulation of Beam and Plasma Systems*

Steven M. Lund, Jean-Luc Vay, Remi Lehe, Daniel Winklehner and David L. Bruhwiler

Lecture: **Electron Bunch Compression**



Instructor: David L. Bruhwiler

Preparation of most materials: Christopher Hall, RadiaSoft LLC

U.S. Particle Accelerator School sponsored by **Old Dominion University**

<http://uspas.fnal.gov/programs/2018/odu/courses/beam-plasma-systems.shtml>

January 15-26, 2018 – Hampton, Virginia

This material is based upon work supported by the U.S. Department of Energy, Office of Science, Offices of High Energy Physics and Basic Energy Sciences, under Award Number(s) DE-SC0011237 and DE-SC0011340.



U.S. DEPARTMENT OF
ENERGY


Office of Science

Goals

- Brief review of rf cavity phase
 - how it affects longitudinal phase space of accelerated beam
 - need to understand longitudinal phase space conventions of Elegant
- Brief review of linear optics and R-matrix
- Brief discussion of simple chicane concept
- Why do we need electron bunch compression?
 - increase luminosity in a collider
 - increase peak current in a free-electron laser



rf Cavity

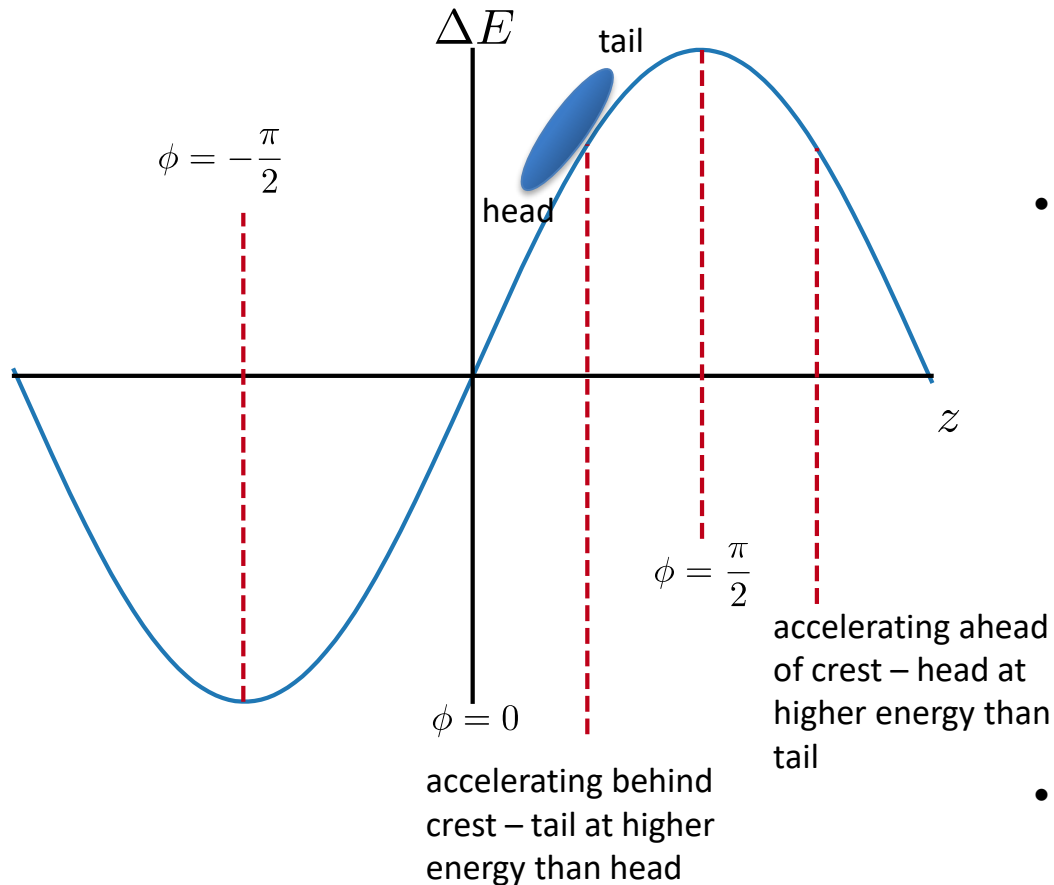

- Following elegant, use a sine convention for the rf wave

$$E_f(z) = E_0 + eV \sin(k_{rf}z + \phi)$$
- Energy gain will be determined by voltage V and phase ϕ
 - Acceleration

$$0 \leq \phi \leq \pi$$
 - Zero-crossing


$$\phi = 0, \pi$$
 - Deceleration

$$-\pi \leq \phi \leq 0$$
- Convention for longitudinal variable z (i.e. t) in elegant:

$$z_{head} < z_{tail}$$

Chicane

- For relativistic particles, energy differences are not velocity differences
 - all particles are moving with velocities very close to c
- Hence, magnetic fields can be used for longitudinal compression
 - Particles with different energies will take different paths through a dipole
 - If we correlate particle energy with longitudinal position we can use a sequence of dipoles to perform compression
 - We need higher energy particles at the back of the bunch and lower energy at the head

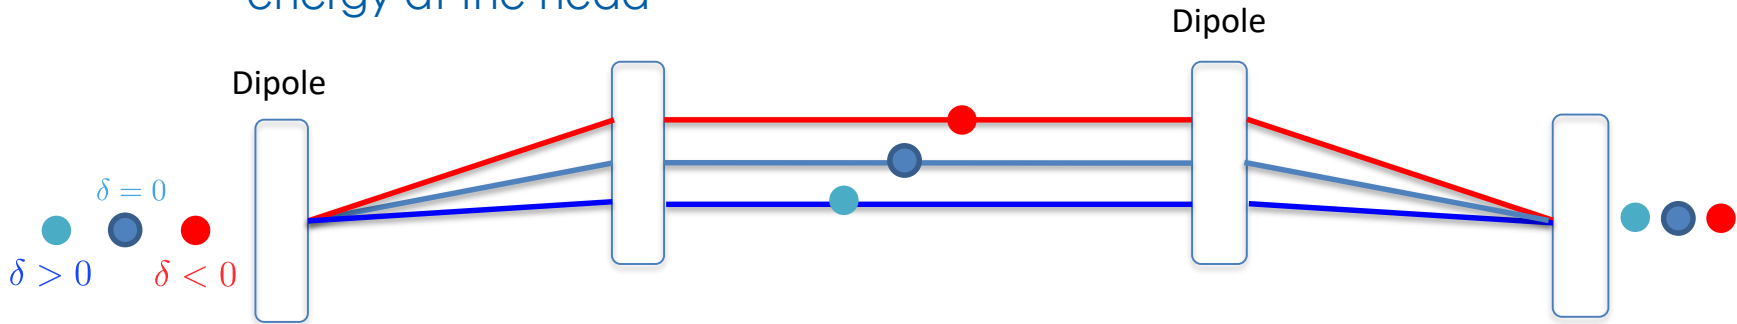

Nominal Bending Angle:

$$\theta_0 = \frac{l_{dip}}{\rho} = \frac{eB}{p_0} l_{dip}$$


Bending Angle for off-energy particles:

$$\theta(\delta) = \frac{\theta_0}{1 + \delta}$$

- Higher-energy particles are bent less
 - they take a shorter path
- Lower-energy particles are bent more
 - they take a longer path
- The high-energy tail shifts forward; the low-energy head shifts back → *Compression!*



Bunch Compression

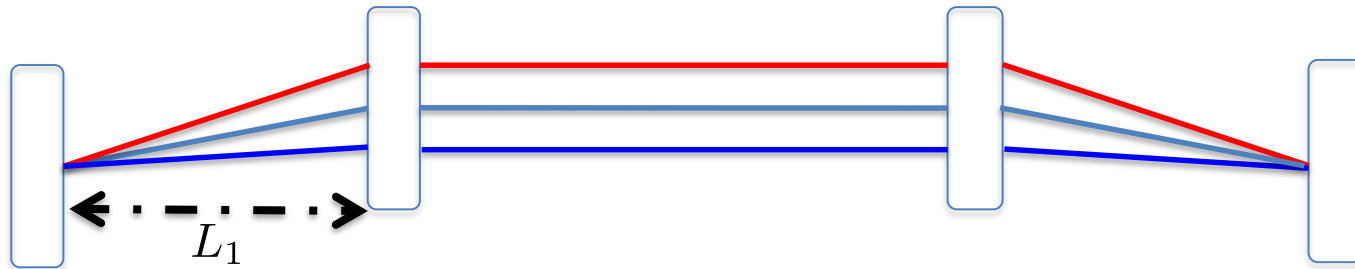

Path distance for one leg

$$s_{leg} = \frac{L_1}{\cos(\theta)}$$

Bending angle for off-energy particles:

$$\theta(\delta) = \frac{\theta_0}{1 + \delta}$$

The difference in path length for an on energy and off-energy particle will be:

$$\Delta s = \frac{L_1}{\cos(\theta)} - \frac{L_1}{\cos(\theta_0)}$$

Using this expression and the bending angle, we get a first-order approximation for the energy difference corresponding to a given path length difference:


$$\Delta s \approx -2L_1\theta^2\delta$$

Transport Matrix Notation (R-Matrix)

Express particles in term of 6D phase space coordinates:

$$\vec{x} = \begin{pmatrix} x \\ x' \\ y \\ y' \\ z \\ \delta \end{pmatrix}$$

For linear optics, we can use matrices to represent components of an accelerator beamline. This R-matrix transforms the phase space state from initial to final:

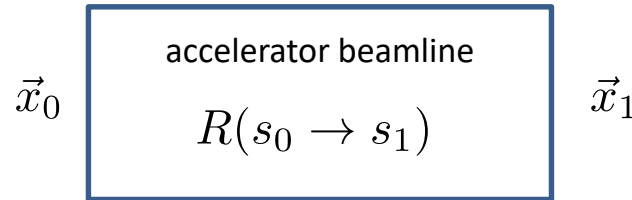

The R matrix for a beamline is the concatenation of R matrices for individual elements:

$$\vec{x}_1 = R_i \dots R_2 R_1 \vec{x}_0$$



$$\vec{x}_1 = R \vec{x}_0$$

For nonlinear effects, like chromatic aberrations or emittance growth, one can generalize the R-matrix to a transfer map, which often takes the form of a Taylor series up to arbitrary order:

$$x_i(1) = \sum_{j=1}^6 R_{ij} x_j(0) + \sum_{j=1}^6 \sum_{k=1}^6 T_{ijk} x_j(0) x_k(0) + \sum_{j=1}^6 \sum_{k=1}^6 \sum_{l=1}^6 U_{ijkl} x_j(0) x_k(0) x_l(0) + \dots$$



An Ideal Chicane

- The R-Matrix for an ideal chicane has the special form shown below
 - no transverse coupling
 - no acceleration
 - bending only in the horizontal plane
- 4 elements must be zero to enforce:
 - no horizontal dispersion
 - no dependence on horizontal position

$$R = \begin{pmatrix} R_{11} & R_{12} & 0 & 0 & 0 & R_{16} \\ R_{21} & R_{22} & 0 & 0 & 0 & R_{26} \\ 0 & 0 & R_{33} & R_{34} & 0 & 0 \\ 0 & 0 & R_{43} & R_{44} & 0 & 0 \\ R_{51} & R_{52} & 0 & 0 & 1 & R_{56} \\ 0 & 0 & 0 & 0 & 0 & 1 \end{pmatrix}$$

$$R_{16} = R_{26} = R_{51} = R_{52} = 0$$

- This leaves only one component to determine longitudinal position:

$$z_f = (1 + R_{56})z_i$$


What is R_{56} ? $R_{56} \equiv \frac{\Delta z}{\delta}$

Using our calculation on slide #5, we have:

$$R_{56} = -2L_1\theta^2$$



Putting it all together – Linac and Chicane

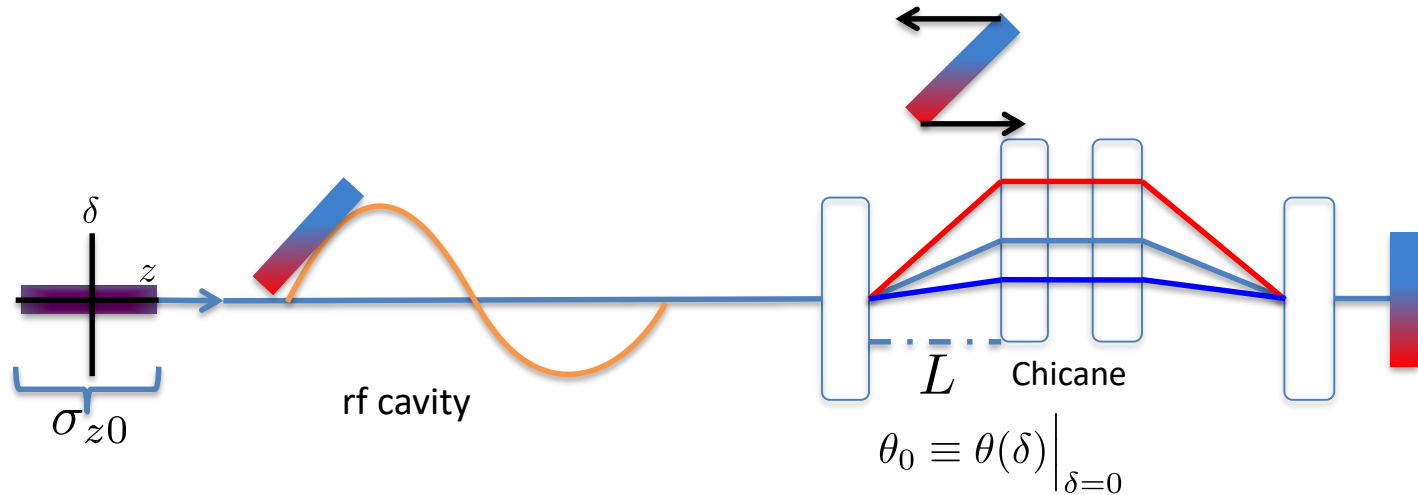

Use acceleration off-crest in the rf cavity to correlate energy with longitudinal position.

Referred to as energy chirp:

$$h \equiv \frac{dE}{E_0 dz} \approx \frac{k_{rf} eV \cos(\phi)}{E_0 + eV \sin(\phi)}$$

Calculate the expected compression (to first-order) based on h and R_{56} :

$$C = \frac{\sigma_{z0}}{\sigma_{zf}} = \frac{1}{|1 + hR_{56}|}$$

Wrap up:

- Any questions?
- For the computer lab, we will construct a linac + chicane + focusing optics to demonstrate a basic bunch compressor.
- This is more involved than previous Sirepo/elegant exercises, so we'll start now

